

Webex Room Kit



Contents

03	Webex Room Kit overview
04	Webex Room Kit features and benefits
05	Webex Room Kit prominent feature/differentiator
05	Webex Room Kit registration
06	Product specifications
11	Regulatory compliance
12	Ordering information
15	Warranty information
15	Cisco environmental sustainability
15	Cisco Service and Support
15	Cisco Capital



Above: Webex Room Kit in small room scenario

Webex Room Kit is a powerful collaboration solution that integrates with flat panel displays to bring more intelligence and usability to your small to medium-sized meeting rooms—whether registered on the premises or to Webex in the cloud.

Webex Room Kit overview

Webex® Room Kit delivers the unmatched video and audio experience customers have come to expect from Cisco. In addition, new capabilities enable even smarter meetings, smarter presentation capabilities, and smarter room and device integrations—further removing the barriers to usage and deployment of video in small to medium-sized rooms.

The Room Kit—which includes camera, codec, speakers, and microphones integrated in a single device—is ideal for rooms that seat up to seven people. It offers sophisticated camera technologies that bring speaker-tracking capabilities to smaller rooms. The product is rich in functionality and experience but is priced and designed to be easily scalable to all of your small conference rooms and spaces—whether registered on the premises or to the Webex cloud service.

Webex Room Kit features and benefits

Table 1. Features and benefits

FEATURE	BENEFIT
Smart meetings	<ul style="list-style-type: none"> • Brings intelligent views to smaller rooms with a discreet, integrated camera <ul style="list-style-type: none"> - Best overview: Automatically detects meeting participants and provides ideal framing - Speaker tracking: Detects and switches between active speakers and provides ideal framing • Great audio experience with integrated microphones and speakers; supports room elegance with no wires or microphones on the table • Automatic noise suppression reduces disruptive sounds coming from the meeting room (e.g., typing, paper rustling) • Simplified meeting-join experience with One Button to Push (OBTP) for scheduled devices in a Webex meeting, whether registered on-prem or to the Webex cloud service • Automatic wake-up: System “wakes up” when someone walks into the room, and recognizes them through their mobile device • Easily controlled by the Webex Room Navigator control unit or with a Webex app • End-to-end security
Smart presentations	<ul style="list-style-type: none"> • Supports dual screens for video and content • Supports dual content sources for local meetings • View whiteboard content and annotations shared from Webex Board, Webex Desk Pro, or the <ul style="list-style-type: none"> • Webex app; participate in whiteboarding sessions through the Webex app* • 4K content sharing (local 30 fps; remote 5 fps) • Wired or wireless content sharing (only two wires required—power and HDMI)
Smart rooms	<ul style="list-style-type: none"> • Metrics: Counts people in the room, enabling analytics for better resource planning • Automatic screen/display integration through HDMI CEC • Supports Wi-Fi • In-room control: Control peripherals such as lights and blinds through the Webex Room Navigator
Built for cloud and premises	<ul style="list-style-type: none"> • Flexibility to register on the premises or to the cloud through Webex • Hardware is optimized to run on a cloud platform, for great experiences in shared rooms and spaces with easy access to hosted conferences

* Supported on Webex-registered devices only



Figure 1. Webex Room Kit with a dual screen setup in a mid-sized meeting room

Webex Room Kit prominent feature/differentiator

Bringing more intelligence to small and medium-sized rooms

The Webex Room Kit offers video innovation in a box, bringing more intelligence and usability to your small to medium team collaboration rooms. While others are still struggling to insert advanced features such as speaker tracking, wireless sharing, and 4K content into their high-end products, Cisco is already bringing these innovations to meeting rooms of all sizes in a cost-effective and simple way. With the Room Kit, Cisco is helping customers experience smarter meetings, enable smarter presentations, and create smarter room and device integrations.

These features were previously the domain of higher-end video conferencing rooms, but can now be brought to every room and every team.

And when registered to Webex, additional cloud-based functionalities are enabled that enhance the user experience and team workflow as well as further simplifying deployment.

- **Smart meetings:** Powerful, integrated cameras deliver intelligent view capabilities, such as automatic framing and speaker tracking; automatic noise suppression reduces meeting disruptions
- **Smart presentations:** Ideal to pair with dual screens while supporting dual content sources, wireless sharing, and 4K content make for great presentations
- **Smart rooms:** People count for usage metrics and resource allocation; tight integrations with screens to enhance user interactions; APIs and macros allow meeting personalization
- **Registration flexibility:** Built for both cloud and onpremises deployment, protecting your investment

Webex Room Kit registration

Table 2. Product registration

LICENSE LEVEL	TERM
Webex Device Subscription	<ul style="list-style-type: none"> ▪ Monthly or 1-, 2-, 3-, 4-, or 5-year options

Product specifications

Table 3. Product specifications

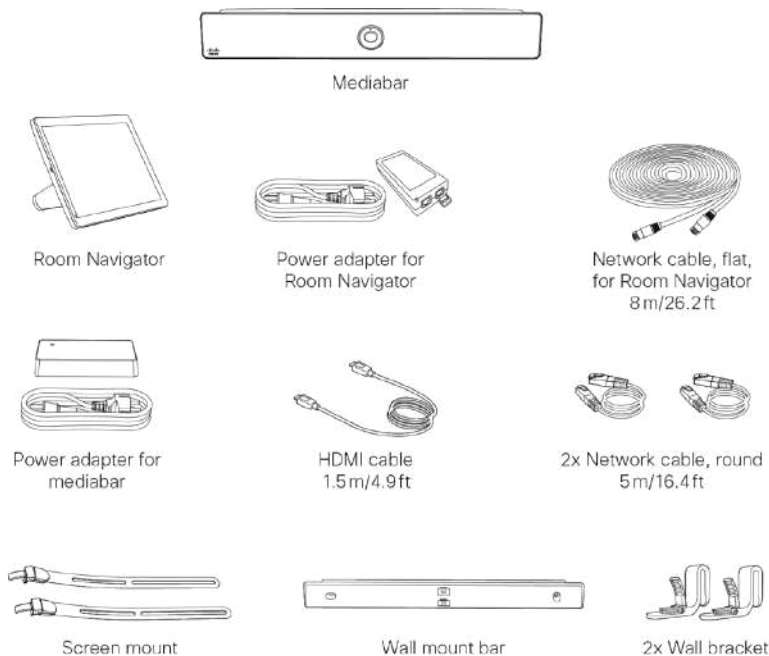
SPECIFICATION	DESCRIPTION
<p>Software compatibility</p>	<p>Cisco Collaboration Endpoint Software Version 9.14.5 or later, and Webex Room OS</p>
<p>Default components in Webex Room Kit</p>	 <p>The diagram illustrates the default components included in the Webex Room Kit. It features a central Mediabar at the top. Below it, the components are arranged in three rows. The first row includes the Room Navigator, its power adapter, and a flat network cable (8m/26.2ft). The second row includes the power adapter for the mediabar, an HDMI cable (1.5m/4.9ft), and two round network cables (5m/16.4ft each). The third row includes a screen mount, a wall mount bar, and two wall brackets.</p>
<p>Optional hardware components</p>	<ul style="list-style-type: none"> • Cisco Table Microphone • Microphone extension cable • HDMI second monitor cable 1.5 m/4.9 ft. • HDMI presentation cable 8 m/26.2 ft.
<p>Bandwidth</p>	<ul style="list-style-type: none"> • Up to 6 Mbps point-to-point
<p>Minimum bandwidth for resolution/frame rate</p>	<ul style="list-style-type: none"> • H.264: • 720p30 from 768 kbps • 720p60 from 1152 kbps • 1080p30 from 1472 kbps • 1080p60 from 2560 kbps

Table 3. Product specifications

SPECIFICATION	DESCRIPTION
Firewall traversal	<ul style="list-style-type: none"> • Cisco Expressway™ technology • H.460.18, H.460.19 firewall traversal
Video standards	<ul style="list-style-type: none"> • H.264, H.265
Video inputs	<ul style="list-style-type: none"> • One HDMI input supports formats up to maximum 4K (3840 x 2160) at 30 fps including HD1080p60 • Consumer Electronics Control (CEC) 2.0
Video outputs	<ul style="list-style-type: none"> • Two HDMI outputs support formats up to 3840 x 2160p60 (4Kp60) • Live video resolutions (encode and decode) up to 1920 x 1080p30 and p60 (HD1080p) • Consumer Electronics Control (CEC) 2.0
Audio standards	<ul style="list-style-type: none"> • G.711, G.722, G.722.1, G.729, AAC-LD, and Opus
Audio features	<ul style="list-style-type: none"> • High-quality 20 kHz audio • Prepared for subwoofer (line out) • Prepared for inductive loop (line out) • Automatic Gain Control (AGC) • Automatic noise reduction • Active lip synchronization
Audio inputs	<ul style="list-style-type: none"> • Two microphones, 4-pin mini-jack • One audio in from HDMI • Internal microphone • Bluetooth® - Not available on Non Radio Version*
Audio outputs (external)	<ul style="list-style-type: none"> • 1 line out mini-jack (stereo) • Bluetooth® - Not available on Non Radio Version*

Table 3. Product specifications

SPECIFICATION	DESCRIPTION
Speakers (integrated)	<ul style="list-style-type: none"> • High-quality speakers: five speakers in balanced configuration • Frequency response 70 Hz to 20 kHz • Amplifier power: 24W • Max output level SPL 86 dB
Speaker tracking	<ul style="list-style-type: none"> • 6-element microphone array for accurate speaker tracking
Dual stream	<ul style="list-style-type: none"> • H.239 (H.323) dual stream • Binary Floor Control Protocol (BFCP) (SIP) dual stream • Supports resolutions up to 3840 x 2160p5
Wireless sharing	<ul style="list-style-type: none"> • Webex app appt (up to 3840 x 2160p5) • Cisco Intelligent Proximity client (up to 1920 x 1080p5) • Miracast (1080p30) – Not available on Non radio version*
Multipoint support	<ul style="list-style-type: none"> • 4-way embedded SIP/H.323 conferencing capability with MultiSite option
MultiSite features (embedded multipoint) (optional upgrade)	<ul style="list-style-type: none"> • Adaptive SIP/H.323 MultiSite: <ul style="list-style-type: none"> – 3-way resolution up to 1080p30 + content up to 4Kp5 – 4-way resolution up to 720p30 + content up to 4Kp5 • Full individual audio and video transcoding • H.323/SIP/VoIP in the same conference • Support for presentation (H.239/BFCP) from any participant at resolutions up to 3840 x 2160p5 • Best Impression (automatic continuous presence layouts) • Encryption and dual stream from any site
Protocols	<ul style="list-style-type: none"> • H.323 • SIP • Cisco Webex
Embedded encryption	<ul style="list-style-type: none"> • H.323 and SIP point-to-point • Standards-based: H.235 v3 and Advanced Encryption Standard (AES) • Automatic key generation and exchange

Table 3. Product specifications

SPECIFICATION	DESCRIPTION
IP network features	<ul style="list-style-type: none"> • DNS lookup for service configuration • Differentiated services (Quality of Service [QoS]) • IP-adaptive bandwidth management (including flow control) • Automatic gatekeeper discovery • Dynamic playout and lip-sync buffering • H.245 Dual-Tone Multifrequency (DTMF) tones in H.323 • RFC 4733 DTMF tones in SIP • Date and time support using Network Time Protocol (NTP) • Media adaptation and resilience • Uniform Resource Identifier (URI) dialing • Dynamic Host Configuration Protocol (DHCP) • 802.1X network authentication • 802.1Q Virtual LAN • 802.1p (QoS and Class of Service [CoS])
Call Control	<ul style="list-style-type: none"> • Cisco Unified Communications Manager (CUCM) <ul style="list-style-type: none"> - Native registration with CUCM - Requires CUCM Version 10.5.2 or later with device pack for Room Kit • Cisco Expressway <ul style="list-style-type: none"> - Native registration with Expressway • Cisco Webex Service • Third-party H.323 Gatekeepers and standards-based SIP proxies
IPv6 network support	<ul style="list-style-type: none"> • Single call stack support for both H.323 and SIP • Dual-stack IPv4 and IPv6 for DHCP, SSH, HTTP, HTTPS, DNS, DiffServ • Support for both static and automatic IP configuration (stateless address auto configuration)
Security features	<ul style="list-style-type: none"> • Management using HTTPS and SSH • IP administration password • Menu administration password • Disable IP services • Network settings protection


Table 3. Product specifications

SPECIFICATION	DESCRIPTION
Certificate management	<ul style="list-style-type: none"> • Certificate Authority Proxy Function (CAPF) support for additional security • Manufacturer-Installed Certificates (MIC) • Locally Significant Certificates (LSC) • X.509 Digital Certificates (DER encoded binary); both DER and Base-64 formats are acceptable for the client and server certificates; certificates with a key size of 1024, 2048, and 4096 are supported
Network interfaces	<ul style="list-style-type: none"> • One Ethernet (RJ-45) 10/100/1000 for LAN • One Ethernet (RJ-45) for Webex Room Navigator touch panel direct pairing • Wi-Fi 802.11a/b/g/n/ac 2.4 GHz/5 GHz, - not available in non-radio versions • 2x2 MIMO <p>Note: Due to compliance regulations, it is required that 802.11d is enabled in the access point for the product to operate properly within 5725 MHz–5875 MHz. Using a Wifi connection is a flexible option, however an Ethernet connection is always preferred for high performance.</p>
Other interfaces	<ul style="list-style-type: none"> • USB 2.0 port, micro USB port, factory reset pinhole
Power	<ul style="list-style-type: none"> • 100 to 240 VAC, 50/60 Hz, 12V DC input • Average 20W, peak 70W
Operating temperature and humidity	<ul style="list-style-type: none"> • 0°C to 40°C (32°F to 104°F) ambient temperature • 10% to 90% Relative Humidity (RH)
Storage and transport temperature	<ul style="list-style-type: none"> • -20°C to 60°C (-4°F to 140°F) at RH 10% to 90% (noncondensing)
Locking mechanism	<ul style="list-style-type: none"> • Kensington security lock

Table 3. Product specifications

SPECIFICATION	DESCRIPTION
---------------	-------------

Dimensions

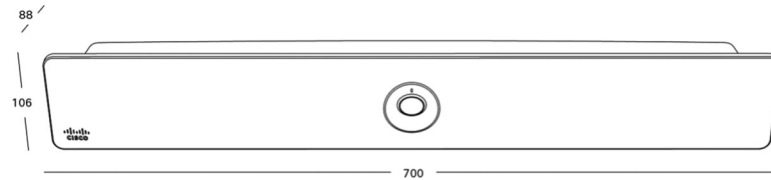

- Width: 27.5 in. (70.0 cm)
- Height: 3.5 in. (10.6 cm)
- Depth: 2.9 in. (8.8 cm)
- Weight: 7 lb. (3.2 kg)

Camera overview

- 5K UltraHD camera
- Supports up to 60 fps (max 30 fps with speaker tracking and best overview enabled)
- 15.1 MP image sensor (5184 x 2916 pixels)
- 1/1.7 CMOS
- 3x zoom
- f/2.0 aperture
- 83° horizontal field of view; 51.5° vertical field of view
- Auto framing (audio + face detect)
- Auto focus, brightness, and white balance
- Focus distance 1 m to infinity

* The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Cisco Systems, Inc. is under license. Other trademarks and trade names are those of their respective owners.

Regulatory compliance

Directive 2014/35/EU (Low-Voltage Directive)

NRTL approved (Product Safety)

Directive 2014/30/EU (EMC Directive)—Class A

FCC CFR 47 Part 15B (EMC)—Class A

Directive 2014/53/EU (Radio Equipment Directive)

FCC Listed (Radio Equipment)

Directive 2011/65/EU (RoHS)

Please check the Product Approval Status Database [ciscofax.com](https://www.cisco.com/ciscofax.com) for approval documents

Directive 2002/96/EC (WEEE)

per country.

Ordering information

To place an order, [contact](#) your local Cisco representative and refer to the table below.

Table 4. Ordering information

PRODUCT NAME	PART NUMBER	COMPLIANCE MODEL NUMBER
Webex Room Kit–Subscription pricing (MSRP*)	CS-KIT-MSRP-K9	TTC7-23
	CS-KIT-S-M-UNIT+	TTC5-15
	<ul style="list-style-type: none"> Webex Room Kit Unit Webex Room Navigator Control Unit MSRP Cisco Webex Service 	CS-T10-TS+
		A-SPK-SH-RMK (A-SPK-SH)
Webex Room Kit–Upfront pricing (GPL**)	CS-KIT-K9	TTC7-23
	<ul style="list-style-type: none"> Webex Room Kit Unit Webex Room Navigator Control Unit 	CS-KIT-S-UNIT+
		CS-T10-TS+
Webex Room Kit–NO RADIO	CS-KIT-NR-K9	TTC7-23
	<ul style="list-style-type: none"> Webex Room Kit Unit Webex Room Navigator Control Unit 	CS-KIT-S-NR+
		CS-T10-TS+
Webex Room Kit–TAA	CS-KIT-K9++	TTC7-23
	<ul style="list-style-type: none"> Webex Room Kit Unit Webex Room Navigator Control Device 	CS-KIT-S-UNIT++ or
		CS-KIT-S-NR++
		CS-T10-TS+
Webex Room Kit–No Encryption	CS-KIT-K7	TTC7-23
	<ul style="list-style-type: none"> Webex Room Kit Webex Room Navigator Control Unit 	CS-KIT-S-UNITK7+
		CS-T10-TS+

* MSRP = Manufacturer's Suggested Retail Price

** GPL = Global Price List

Table 4. Ordering information

PRODUCT NAME	PART NUMBER	COMPLIANCE MODEL NUMBER
Options		
Cisco Table Microphone with 4-pin mini jack connector, 7.5 meters cable	CS-MIC-TABLE-J=	-
Cisco Table Microphone with 4-pin Euroblock connector, 9 meters cable	CS-MIC-TABLE-E=	-
Cisco Table Microphone extension cable for the 4-pin mini jack cables, 9 meters	CAB-MIC-EXT-J=	-
Cisco Table Microphone extension cable for the 4-pin mini Euroblock cables, 9 meters	CAB-MIC-EXT-E=	-
Second screen 1.5 m HDMI 2.0 certified cable	CAB-2HDMI-1.5M-GR	-
Presentation cable 8 m 4kp30 certified	CAB-PRES-2HDMI-GR	-
Software options – ordered separately		
Remote Monitoring	L-ROOM-RM (L-TP-RM)	-
MultiSite (embedded multipoint) L-KIT	L-KIT-MS (L-ROOM-PAK)	-
Spares		
Webex Room Kit–Subscription (MRSP)–SPARE	CS-KIT-UNIT=	TTC7-23
Webex Room Kit–Upfront (GPL)–SPARE	CS-KIT-UNIT=	TTC7-23

Table 4. Ordering information

PRODUCT NAME	PART NUMBER	COMPLIANCE MODEL NUMBER
Webex Room Kit–No Radio–SPARE	CS-KIT-NR=	TTC7-23
Webex Room Kit–No Encryption–SPARE	CS-KIT-UNITK7=	TTC7-23
Power Supply for Room Kit	PSU-12VDC-70W-GR=	FSP070-AHAN2, ADF019
Webex Room Navigator Control Unit	CS-T10-TS+	TTC5-15
Cisco PoE power injector	CS-POE-INJ=	POE16U-1AF, FA015LS1-00
Cisco Table Microphone spare cable for the 4-pin mini jack connector, 7.5mm cable	CAB-MIC-TABLE-J=	-
Cisco Table Microphone spare cable for the 4-pin Euroblock connector, 9m cable	CAB-MIC-TABLE-E=	-
Cisco Table Microphone spare table-top metal plate (3 units)	CS-MIC-TABLE-PLA=	-
Cable Cover for Room Kit	CS-KIT-CAB-COV=	-
Screen Mount Kit for Room Kit	CS-KIT-S-SMK=	-
Wall Mount Kit for Room Kit	CS-KIT-S-WMK=	-

Warranty information

Webex Room Kit has a 90-day limited liability warranty.

Cisco environmental sustainability

Information about Cisco's environmental sustainability policies and initiatives for our products, solutions, operations, and extended operations or supply chain is provided in the "Environment Sustainability" section of [Cisco's Corporate Social Responsibility](#) (CSR) Report.

Reference links to information about key environmental sustainability topics (mentioned in the "Environment Sustainability" section of the CSR Report) are provided in the following table:

SUSTAINABILITY TOPIC	REFERENCE
Information on product material content laws and regulations	Materials
Information on electronic waste laws and regulations, including products, batteries, and packaging	WEEE compliance

Cisco makes the packaging data available for informational purposes only. It may not reflect the most current legal developments, and Cisco does not represent, warrant, or guarantee that it is complete, accurate, or up to date. This information is subject to change without notice.

Cisco Service and Support

Cisco and our partners provide a broad portfolio of intelligent, personalized services and support that can help you realize the full value of your Cisco Collaboration investment by increasing business agility and network availability. Our portfolio of services helps you accelerate business innovation through a network-based collaboration platform that enables businesses to collaborate anywhere, at any time. For more information about these services, visit <https://www.cisco.com/c/en/us/solutions/collaboration/service-listing.html>.

Cisco Capital

Flexible payment solutions to help you achieve your objectives

Cisco Capital makes it easier to get the right technology to achieve your objectives, enable business transformation and help you stay competitive. We can help you reduce the total cost of ownership, conserve capital, and accelerate growth. In more than 100 countries, our flexible payment solutions can help you acquire hardware, software, services and complementary third-party equipment in easy, predictable payments. [Learn more](#).



For more information

Learn more about the [Webex Room Kit](#).

Download the [Webex App](#).

Date May 2022

C78-738729-13